

WAT-2300 1/2.8" HD-TVI Camera


Full HD CMOS sensor



Key features

- 1/2.8-inch 2M CMOS image sensor with high sensitivity
- Min. illumination 0.1 lx F1.2
- Digital interface HD-TVI without latency and degradation, HD resolution of 1080p30 Full HD
- Long distance transmission without boost (3C-2V:150m, 5C-2V:300m)
- Existing infrastructure doesn't need to be replaced, just change their old analog cameras and DVRs to TVI cameras and DVRs to get a brand new 1080p surveillance system without extra cost
- OSD (On Screen Display) – Easy installation through a controller provided in kit

Dimensions

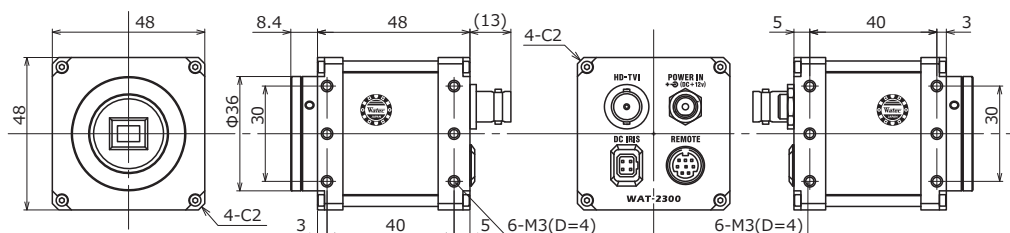


Specifications


Pick-up element	1/2.8-inch CMOS image sensor
Number of effective pixels	1080 mode: 1920(H) × 1080(V) / 720 mode: 1280(H) × 720(V)
Unit cell size	2.8μm × 2.8μm
Imaging system	RGB+W array mosaic filters on chip
Synchronizing system	Internal
Scanning System	Progressive
Video Output	HD-TVI
Output format	1080/30p, 1080/25p, 720/60p, 720/50p, 720/30p, 720/25p
Minimum Illumination	0.1 lx F1.2
S/N	More than 50dB
Function settings	OSD (On Screen Display) / RS-232, Remote controller
AE mode	E.I+AGC, AGC, FL, MANUAL
Shutter speed	OFF, FL, 1/200, 1/500, 1/1000, 1/2000, 1/5000, 1/10000 sec.
Flickerless mode	AUTO, 50Hz, 60Hz, OFF
White balance	ATW, PWB, Preset, MANUAL
AGC	HIGH, MEDIUM, LOW
MGC	0 - 30dB
Gamma characteristics	ON / OFF
Noise reduction	HIGH, MEDIUM, LOW, OFF
Wide dynamic range	ON (ATR) / OFF
Lens iris	DC
Back light compensation	ON / OFF
White blemish correction	Max. 1023 dots
Defog	ON / OFF
Mirror image	OFF / H-FLIP / V-FLIP / HV-FLIP
Power supply	DC+12V±10%
Power consumption	1.92W/160mA (720/60p)
Operating temperature	-10 - +50°C
Storage temperature	-30 - +70°C
Operating / Storage humidity	95% RH or less (Without condensation)
Lens mount	CS mount
Weight	Approx. 130g
Accessories	WPDC12-R (DC plug), Hex. wrench, RC-02 (Remote controller), Camera bracket

Accessories
Options







CS-mount lenses

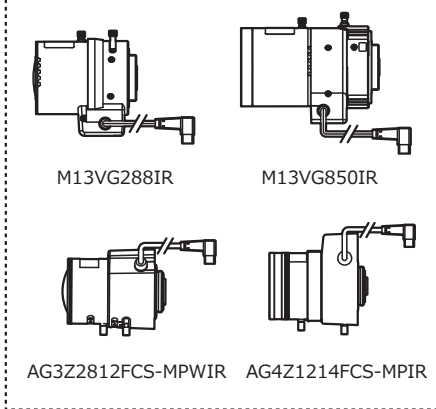





Miniature lenses / Mount adaptors

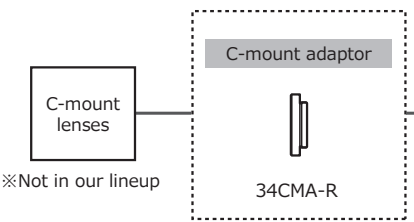

WAT-2300

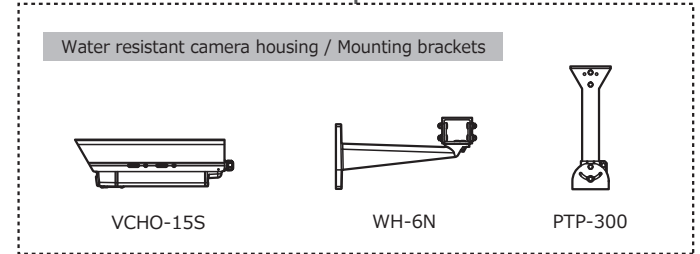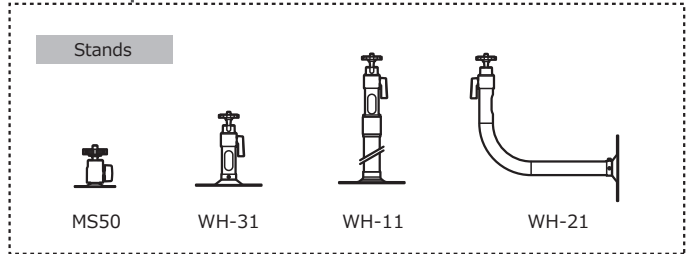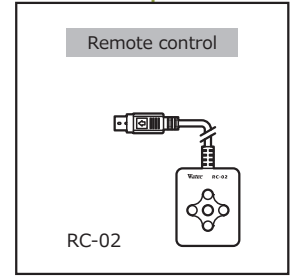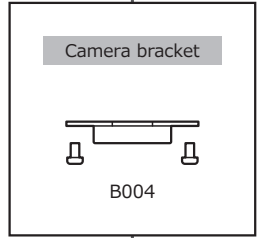

Cable

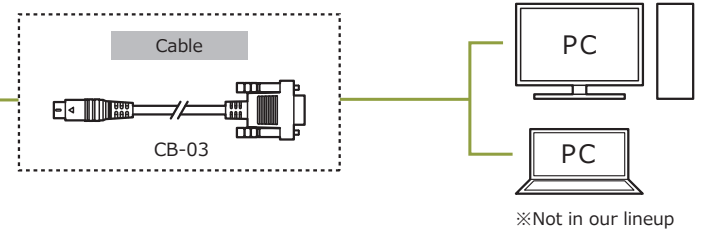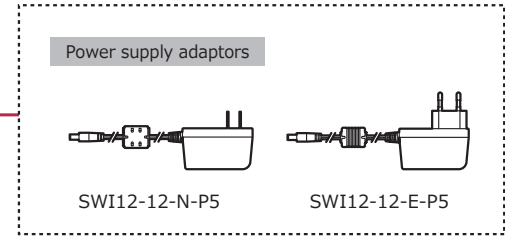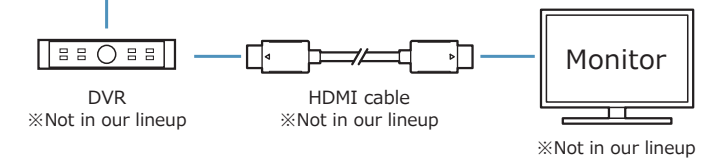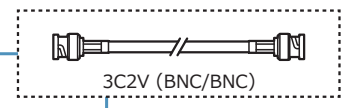

VIDEO OUT (BNC)

POWER IN (DC12V)

REMOTE

RS-232